


NO	PAT. NO	NAME	MATL	QTY	TREAT	REMARK
1	M-631-PF-R	3 PIN CONNECTOR	---	1	---	---
2	V-034PX-R	WIRE	---	3M	---	24AWG

NO	ELECTRICAL SPECIFICATIONS	
1	Rated current/voltage	3A-125V MAX. 5mA-5V MIN.
2	Operation limits voltage (AC.V.rms)	---
3	Withstanding voltage (AC.V.rms) 1 minute	300
4	Insulation resistance (MΩ MIN.) at DC 500V	100

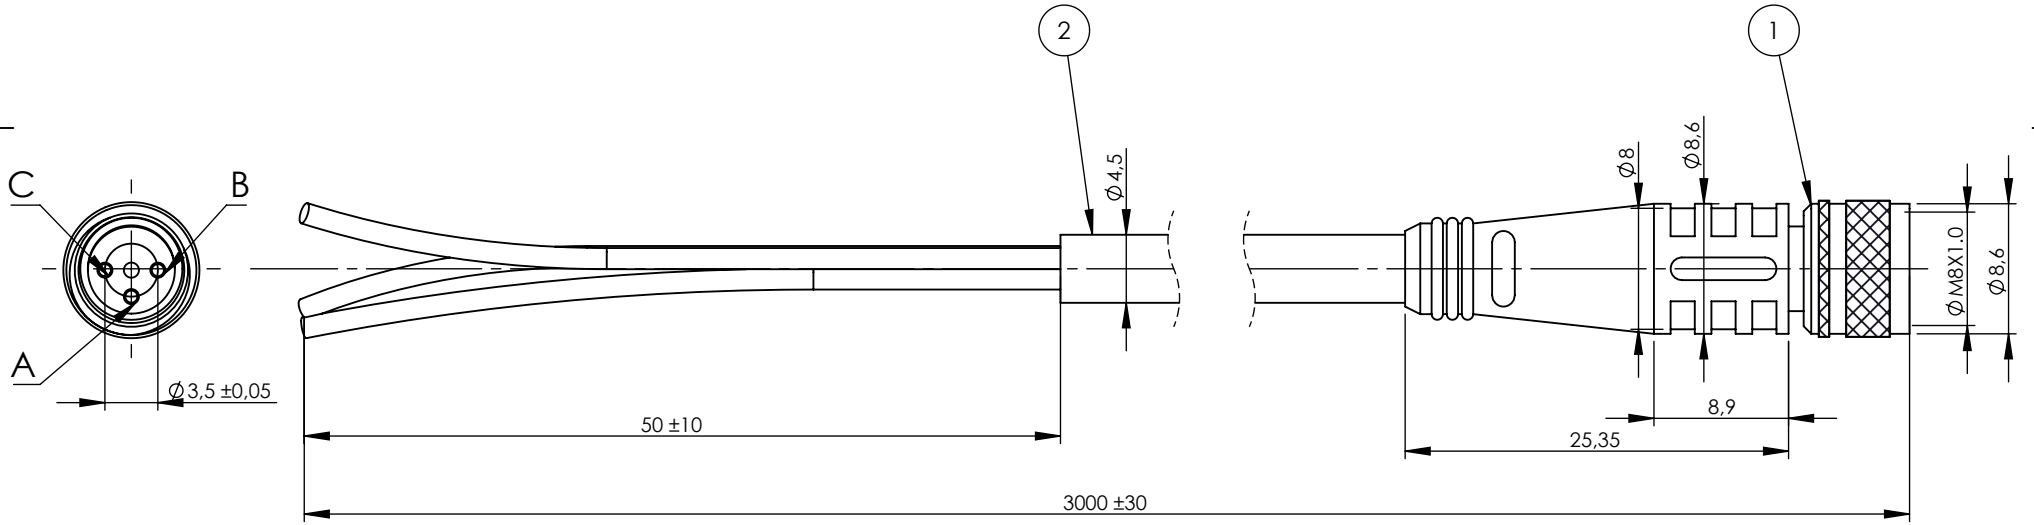

A	BLACK INSULATION
B	BLUE INSULATION
C	BROWN INSULATION

NAME	DATE	ARTICLE NO:	REVISION:	TITLE:
DRAWN	Halit Yılmaz			
CHECKED	Ahmet Altınışık			
 www.altinkaya.com.tr		COMMENTS: This drawing is subject to technical modification without prior notice. Typographical and other errors do not justify any claims for damages. All dimensions should be verified using an actual produced part.		

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS
 THE SOLE PROPERTY OF ALTINKAYA ENCLOSURES.
 ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF ALTINKAYA
 ENCLOSURES IS PROHIBITED.

MATERIAL:

WEIGHT:

SCALE:2:1

SHEET 1 OF 1

M-631-PF3-R

A4

