

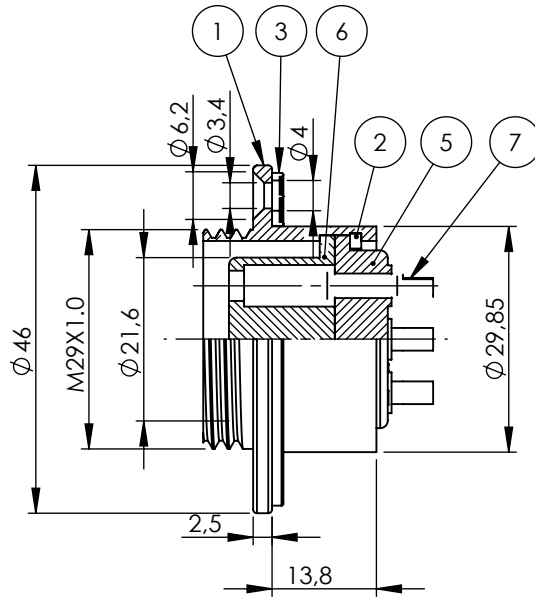
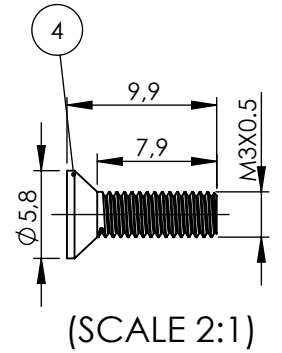


NO	PAT. NO	NAME	MATL	QTY	TREAT	REMARK
1	C-3002-RA	BODY	Zn ALLOY	1	M-Cr	---
2	C-3002-RD	RING	SUS	1	---	---
3	C-3002-RE	GASKET	RUBBER	1	BLACK	---
4	C-3002-RI-R	SCREW	STEEL	3	M-Ni	---
5	H-3004-RFA	BAKELITE BASE	BAKELITE	1	BLACK	---
6	H-3004-RFB	BAKELITE COVER	BAKELITE	1	BLACK	---
7	H-3004-RFC-R	TERMINAL	BsBM	4	M-Au	---

NO	ELECTRICAL CHARACTERISTICS	
1	Rated Current/voltage	15A 250V
2	Operation limit voltage (AC.V.rms)	400
3	Withstanding voltage (AC.V.rms) 1 minute	2000
4	Insulation resistance (MΩ MIN.) at DC 500V	2000
5	Contact resistance (mΩ MAX.) at DC 1A	3

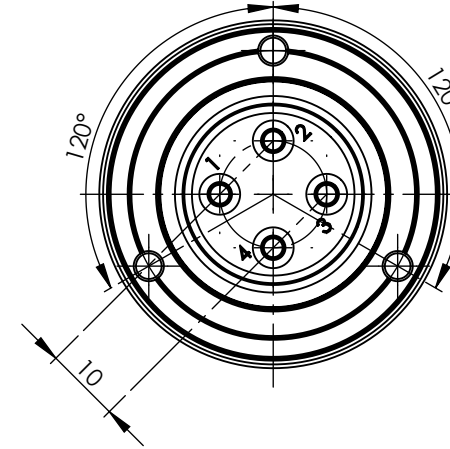

SECTION A-A

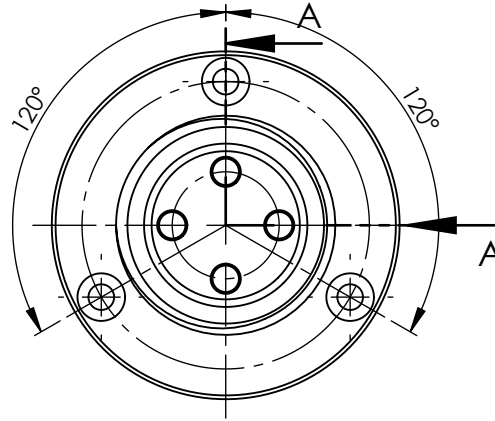

(SCALE 2:1)

NAME	DATE	ARTICLE NO:	REVISION:	TITLE:
DRAWN	Halit Yılmaz			
CHECKED	Ahmet Altınışık			
 ALTINKAYA ENCLOSURES FOR ELECTRONICS www.altinkaya.com.tr		COMMENTS:		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTINKAYA ENCLOSURES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTINKAYA ENCLOSURES IS PROHIBITED.		DİKKAT: BU RESİM VE ÜRÜN ÖNCEDEN HABER VERİLMEKSİZİN DEĞİŞTİRİLEBİLİR. RESİM ÇİZİLİRKEN HATASIZ OLMASINA ÇALIŞILMASINA RAĞMEN RESİMDE HATALAR BULUNABİLİR. RESİMDEKİ HATALARDAN DOLAYI OLUŞABİLECEK ZARARLAR İÇİN ALTINKAYA HiÇ BİR SORUMLULUK KABUL ETMEZ. BÜTÜN ÖLÇÜLER KULLANILMADAN ÖNCE ÜRETİLMİŞ GERÇEK NUMUNEDEN KONTROL EDİLMELİDİR.		
MATERIAL:		WEIGHT:		SCALE:1:1
DWG NO.		PLT-304-RF-R		A4
SHEET 1 OF 1				