

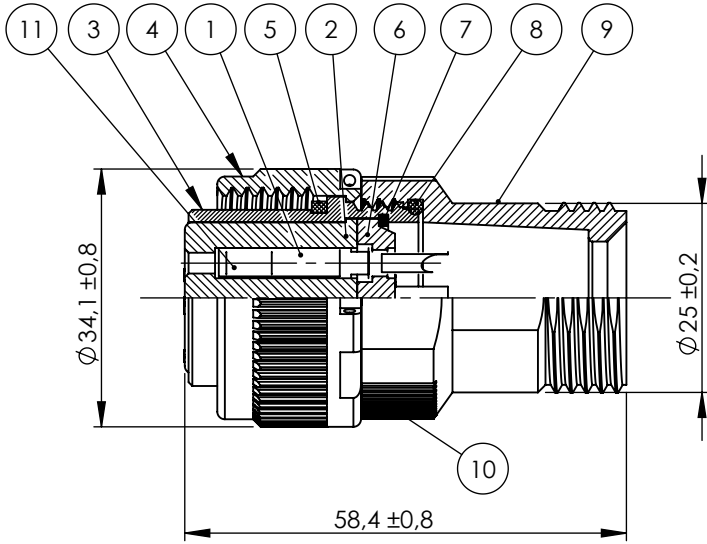


NO	PAT. NO	NAME	MATL.	QTY	TREAT	REMARK
1	K-053BS-R	CONTACT	COPPER ALLOY	4	M-Ag	---
2	F-015BB	INSULATOR	POLYESTER	1	---	BLACK
3	B-602AZB-R-M	SHELL	AL ALLOY	1	Cr	BLACK
4	A-109AZB-R	CAP	AL ALLOY	1	Cr	BLACK
5	O-128RX	RING (O)	RUBBER	1	---	BLACK
6	E-027BB	COVER	POLYESTER	1	---	BLACK
7	Q-102BZ-R	RING	PBW	1	Cr	BLACK
8	O-134RX	RING (O)	RUBBER	1	---	BLACK
9	C-151AZB-R	SHELL	AL ALLOY	1	Cr	BLACK
10	BA3*3FB-R	SCREW	STEEL	1	Cr	BLACK
11	Q-084BS-R	SPACER	BeCu	4	M-Ag	---

NO	ELECTRICAL SPECIFICATIONS	
1	WITHSTANDING VOLTAGE	AC:2000V ONE MINUTE
2	INSULATION RESISTANCE	5000MΩ min.AT DC 500V

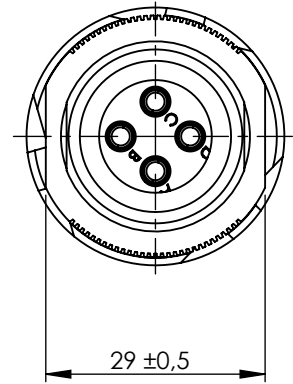

SECTION A-A

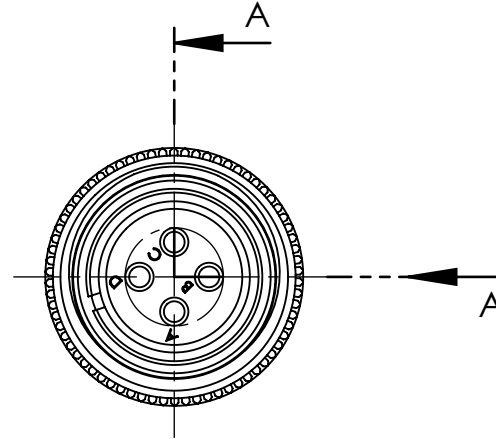

	NAME	DATE	ARTICLE NO:	REVISION:	TITLE:
DRAWN	Halit Yılmaz				
CHECKED	Ahmet Altınışık		COMMENTS: This drawing is subject to technical modification without prior notice. Typographical and other errors do not justify any claims for damages. All dimensions should be verified using an actual produced part.		
ALTINKAYA ENCLOSURES FOR ELECTRONICS www.altinkaya.com.tr PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTINKAYA ENCLOSURES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTINKAYA ENCLOSURES IS PROHIBITED.					
MATERIAL:			DWG NO. WPS3106A 18-10S-R		
WEIGHT:			SCALE:1:1		
SHEET 1 OF 1			A4		