


NO	PAT. NO	NAME	MATL	QTY	TREAT	REMARK
1	M-642-PM-R	4 PIN CONNECTOR	---	1	---	---
2	V2464#24BC-R	WIRE	UL2464 CORE 24AWG	3.03M	---	

No.	Cord color
1	BROWN
2	WHITE
3	BLUE
4	BLACK

NO	ELECTRICAL SPECIFICATIONS	
1	Rated current/voltage	3A-125V MAX. 5mA-5V MIN.
2	Operation limits voltage (AC.V.rms)	
3	Withstanding voltage (AC.C.rms) 1 minute	300
4	Insulation resistance (MΩ MIN.) at DC 500V	100

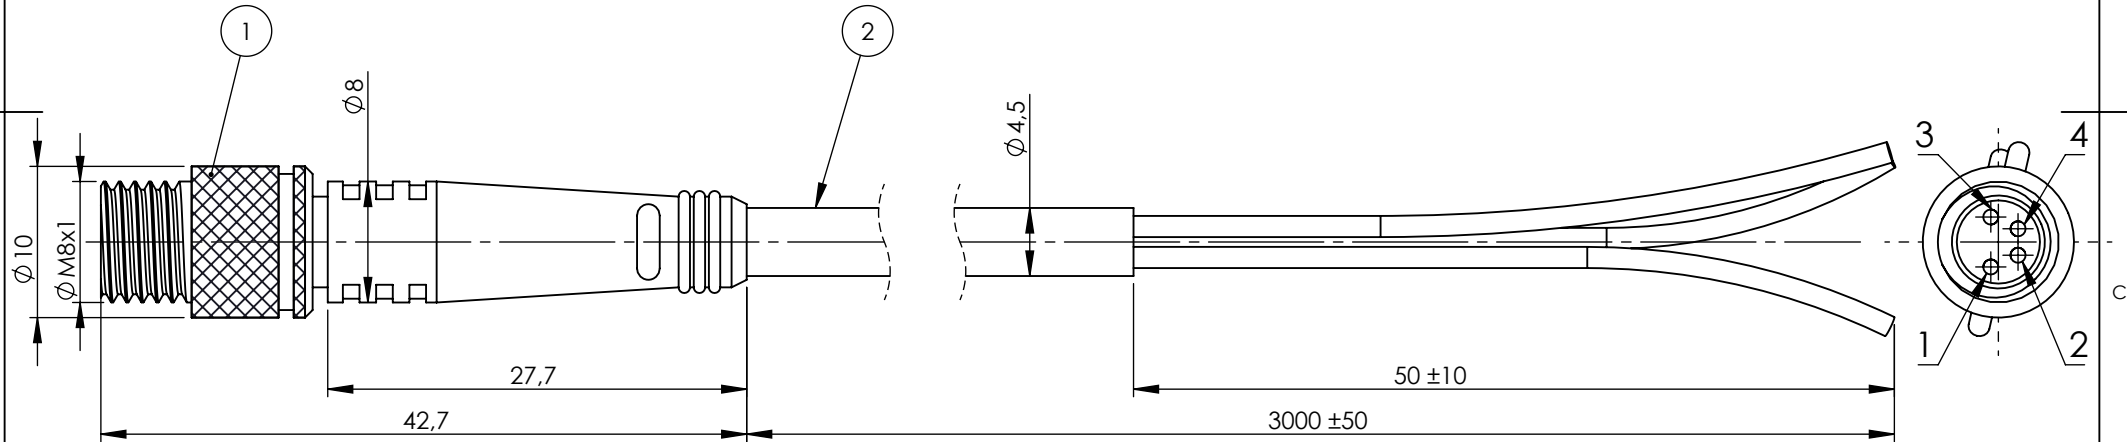

	NAME	DATE	ARTICLE NO:	REVISION:	TITLE:
DRAWN	Halit Yılmaz				
CHECKED	Ahmet Altınışık		COMMENTS: This drawing is subject to technical modification without prior notice. Typographical and other errors do not justify any claims for damages. All dimensions should be verified using an actual produced part.		
ALTINKAYA ENCLOSURES FOR ELECTRONICS www.altinkaya.com.tr PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALTINKAYA ENCLOSURES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALTINKAYA ENCLOSURES IS PROHIBITED.					
			DWG NO. M-642-PM3-R		
			A4		
					
MATERIAL:			WEIGHT:	SCALE:2:1	SHEET 1 OF 1